


OKS 8600 / OKS 8601 BIologic Multi Oil

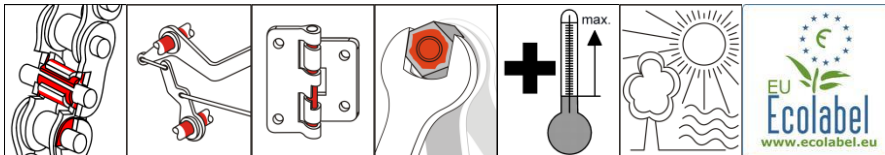

Description

OKS 8600 / OKS 8601 is a biodegradable multipurpose oil and has been awarded the EU Ecolabel Certificate for particularly environmentally-friendly products.

Applications

- Lubrication of chains and machine elements operated outdoors
- Multi Oil also at higher temperatures

Main fields of application

- Forestry, agriculture and water management
- Waste-water treatment and composting plants
- Workshop and gardening tools

Advantages and benefits

- Good lubricating properties
- Good creep capacity
- Biodegradable, EU Ecolabel NL/27/008
- VOC-free
- Can be used up to 160°C
- Silicone-free
- Percentage of renewable raw materials > 90%
- Spray version OKS 8601

Application Tips

For highest effectiveness, clean the point to be lubricated. Best way is to clean mechanically first and then with OKS 2610 / OKS 2611 universal cleaner. Apply OKS 8600 evenly with a brush, drip oiler, by immersion or using a suitable automatic lubrication system. Spray OKS 8601 on evenly. Allow the product to soak in before operating. Check compatibility with seals and paintwork before using. Avoid excesses. Observe the plant manufacturer's instructions.

Our customer advice service will be pleased to help should you have any further questions.

OKS 8600 / OKS 8601 BIologic Multi Oil

Technical Data

	Standard	Conditions	Unit	Value
Marking	analogue to DIN 51 502			CLX 32
Base oil				
Type				Ester
Viscosity	DIN 51 562-1	40°C	mm ² /s	35-40
Viscosity class	DIN 51 519		ISO VG class	32
Flashing point	DIN ISO 2592	>79	°C	270
Application-specific data				
Density	DIN EN ISO 3838	20°C	g/ml	0.92
Colour				yellowish-light brown
Biodegradability	CEC-L-33-T-82	21 days	%	>90
Operating temperatures				
Lower operating temperature			°C	-5
Upper operating temperature			°C	160
Approvals				
EU Ecolabel Certificate				NL/27/008

Packaging

- 5 l canister
- 25 l canister
- 200 l drum
- 400 ml spray can (OKS 8601)

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
82216 Maisach, Germany

Phone: +49 (0) 8142 3051 - 523 and 556
Fax: +49 (0) 8142 3051 - 923 and 956

info@oks-germany.com
www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress.
® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com.

