




OKS 701 – Product Information

OKS 701 Synthetic Oil, Spray

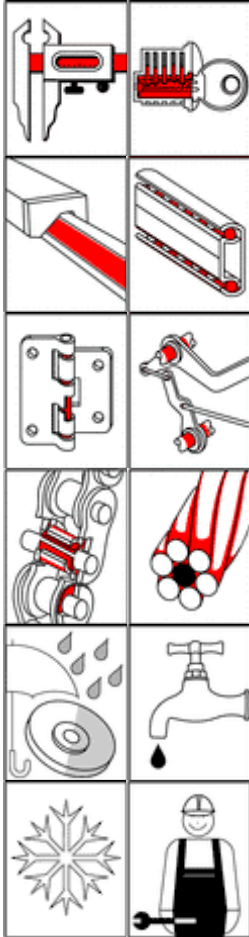

Fields of Application:

Lubrication, cleaning and protection of bare metallic precision like machine tool parts, measuring equipment, precise mechanical and optical instruments, weapons. For machine elements of all kinds like sliding parts or slideways, threads, locks, hinges, drives.

Advantages and Benefits:

Highly effective due to good wetting, dissolving and protective properties. Behaves neutrally to plastics, elastomers and paints. Good protective capability against corrosion-causing moisture and wetness. Versatile usage on applications for care, conservation and maintenance reasons.

Application:

For highest effectiveness, clean the lubrication point. Best way is to clean mechanically first and then with OKS 2610 or OKS 2611 universal cleaner. Spray a sufficient amount on lubrication point. Remove excess oil. Mix with suitable lubricants only. For additional questions please contact our Technical Department.

Additional Information:

Packaging (Article number):

- 100 ml Spray (00701001)
- 400 ml Spray (00701004)

Version:
E-03.1/13

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. © = Registered Trademark



OKS 701 Synthetic Oil, Spray

Technical Data

	Norm	Conditions	Unit	Value
Classification	analog DIN 51 502			CL X 15
Base Oil				
Type				Polyisobutylene
Viscosity	DIN 51 562-1	+40°C	mm ² /s	17,5
Class of viscosity	DIN 51 519	DIN 51 562-1, 40°C	ISO VG- Klasse	15
Flash point	DIN ISO 2592	> 79	°C	92
Application Data				
Density	DIN EN ISO 3838	+20°C	g/ml	0,84
Colour				light-brown
Service Temperatures				
Minimum service temperature			°C	-50
Maximum service temperature			°C	100
Corrosion Protection Tests				
Salt spray test	DIN 50 021	6 µm	h	> 24

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use, own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark