




OKS 1155 - Product Information

Fields of Application:

Lubrication of sliding points between metals, plastics and elastomers to each other and with each other at low sliding speeds with an increased sealing effect, e.g. lubrication of O-rings in pneumatic systems of weapons and brake systems, including for military applications.

OKS 1155 Strongly Adherent Silicone Grease

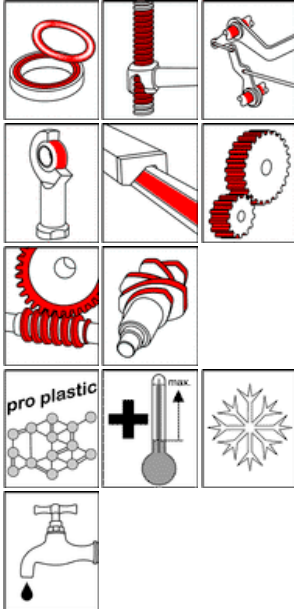

Advantages and Benefits:

Highly effective due to an optimum of highly adhesive silicone grease formula. Excellently suited for lubricating plastics and elastomers. Broad range of uses outside normal grease performance range. Broadband lubricating grease with good sealing properties.

Application:

For best results, clean lubricant points and surfaces carefully, e.g. with OKS 2610 or OKS 2611 universal cleaner. Remove the corrosion protection ahead of the initial filling. Fill the bearings in a way that all the functional surfaces for sure get the grease. Slow moving bearings (DN-value < 50.000) should be filled completely, normal moving bearings should be filled to 1/3 of the free inner housing space, high-speed bearings (DN value > 400 000) up to about 1/4. Observe the instructions of the bearing or machine manufacturer. Relubrication with a grease gun on to the grease nipples or with an automatic lubrication system. Relubrication intervals and amount to be defined acc. to the service conditions. If the removal of the old grease is not possible the amount of grease has to be limited to avoid excess lubrication of the bearing. At longer relubrication intervals a complete exchange of the old grease is recommended. Only mix with appropriate lubricants. Bearings filled with silicon grease must not have higher loads than 1/3rd of the bearing's permitted load. Silicone-based plastics, e.g. silicone rubber, can be dissolved by silicone grease. Silicone grease must not be applied to sliding surfaces under influence of pure oxygen. For additional questions please contact our Technical Department.

Additional Information:

Packaging (Article number):
- 500 g Tin (01155031)
- 5 kg Hobbock (01155050)
- 25 kg Hobbock (01155062)

Version:
E-10.1/06

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 1155 Strongly Adherent Silicone Grease

Technical Data

	Norm	Conditions	Unit	Value
Classification	DIN 51 502	DIN 51 825		MSI2R-60
Base Oil				
Type				Polyphenylmethylsiloxane, Ester
Viscosity	DIN 51 562-1	+25°C	mm ² /s	100
Thickener				
Type				Lithiumhydroxystearate
Consistency	DIN 51 818	DIN ISO 2137	NLGI- class	2
Worked penetration	DIN ISO 2137	60 DH	0,1 mm	260 - 300
Drop point	DIN ISO 2176		°C	205
Oil separation	DIN 51 817	18h/40°C	Weight-%	0,9
Oxidation resistance	DIN 51 808	100h/99°C	bar	< 1,0
Application Data				
Density	DIN EN ISO 3838	+20°C	g/cm ³	0,96
Colour				beige
Service Temperatures				
Minimum service temperature			°C	-65
Maximum service temperature			°C	175
Wear Protection Tests				
SKF-EMCOR	DIN 51 802		Corr.-Grade 1-5	0

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. © = Registered Trademark