



Kisling AG

**Motorenstrasse 102
CH-8620 Wetzikon**

**Telefon +41 (0)58 272 01 01
Telefax +41 (0)58 272 01 03**

**info@kisling.com
www.kisling.com**

TECHNICAL INFORMATION ergo.® 7420

consists out of resin ergo.® 7418 and hardener ergo.® 7419

Base: two-component-epoxy-resin

Curing : at room temperature.
accelerating possible by temperature increase

Application: Universal product with high strength properties and good adhesion to metals, ceramic, glass, rubber, hard plastics and a wide range of other common materials.

Use : Both components must be mixed in advance. The best mixture ratio is 1:1
Using the double-cartridge system with static mixture tube is very easy and avoids failures. The surfaces must be clean, which means, dry and free of dust and grease. For this reason it is recommended to use either the ergo.® Cleaner 9190 (for metal) or the ergo.® Cleaner 9195 (for plastics)

Mixture ratio resin : hardener, by weight 100 : 80
resin : hardener, by volume 1 : 1

Colour resin, hardener colourless, slightly yellow

Viscosity of the mixed product 40 – 45 Pa•s
Acc. to Brookfield cone/plate – system at 25°C, MK25, D=35s⁻¹

Density at 23°C
Resin 1,2 g/cm³
Hardener 0,97 g/cm³
of the mixed product 1,1 g/cm³

Thermal range -60°C bis +100°C

Potlife
2,8g resin + 2,2g hardener at 23°C ~ 100 minutes

Glass transition point 62 °C
Curing: 16 hours at 40°C

Shore D - hardness 70 – 75
Curing: 16 hours at 40°C

Fixture time (> 1 N/mm²) at 23°C 7 hours

Functional strength (> 10 N/mm²)
at 23°C 10 hours
at 60°C 60 minutes
at 100°C 14 minutes

Final strength 72 hours



Kisling AG

**Motorenstrasse 102
CH-8620 Wetzikon**

Telefon +41 (0)58 272 01 01
Telefax +41 (0)58 272 01 03


info@kisling.com
www.kisling.com

- 2 -

Tensile shear strength acc. to EN 1465, metals sandblasted

Curing: 16 hours at 40°C, tested at 23°C

Steel	> 30 N/mm ²
Stainless steel	> 30 N/mm ²
Aluminium	> 25 N/mm ²
Copper	> 20 N/mm ²
Brass	~ 25 N/mm ²
GFRP, Epoxy	~ 24 N/mm ²
Polyamide 6	~ 4 N/mm ²
ABS	> 5 N/mm ²
Polycarbonate	~ 5 N/mm ²
PMMA	~ 2 N/mm ²

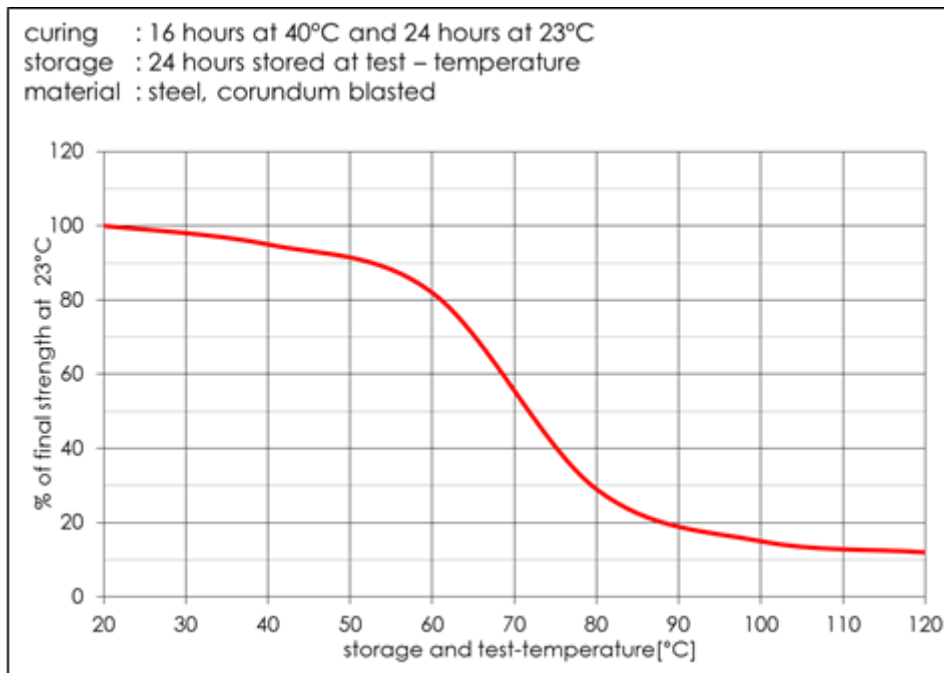

Storage stability between +2°C and +40°C

2 years

WARRANTY INFORMATION - PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that KISLING products are safe, effective, and fully satisfactory for the intended end use. KISLING sole warranty is that the product will meet the KISLING sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. KISLING specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. Unless KISLING provides you with a specific, duly signed endorsement of fitness for use, KISLING disclaims liability for any incidental or consequential damages. Suggestions of uses should not be taken as inducements to infringe any particular patent.