



Toll Free: 87 PERMATEX
(877-376-2839)

6875 Parkland Boulevard, Solon
Ohio 44139

Technical Data Sheet

Permatex® General Purpose Epoxy Products

AAM Revised 11/18

PRODUCT DESCRIPTION

Permatex® General Purpose Epoxies are two part, high strength, clear, epoxy adhesives that are available in several working times. Permatex® General Purpose Epoxies are ideal for complex, multi-piece assemblies. They are water and solvent resistant and available in dual syringes or tubes.

PRODUCT BENEFITS

- Will not shrink
- Various curing cycles
- No clamping needed
- Fills gaps
- Nearly colorless
- Impact resistant
- Water resistant


TYPICAL APPLICATIONS

To bond rigid materials including:

- Chrome
- Fiberglass
- Glass
- Plastics (Excluding polyethylene and polypropylene)
- Metal

DIRECTIONS FOR USE

1. Protect work area from accidental spills.
2. Surface must be clean, dry and free of grease & oil.
3. Roughen surfaces with sandpaper or other abrasives.
4. Use a sharp blade to cut off the tips of both nozzles.
5. Depress plunger on syringe or squeeze out of tubes equal amounts of resin and hardener from tubes. Thoroughly mix resin and hardener on a clean discardable surface for at least one (1) minute (20 to 25 seconds in the case of the one minute epoxy) or until uniform in color.

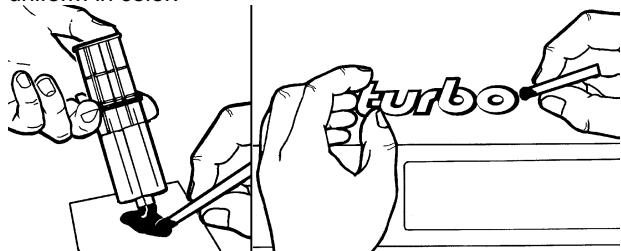

6. Apply to surfaces being repaired. Assemble parts immediately. Remove excess epoxy immediately.
7. Allow bond to set for the fixture time before moving.

DIRECTIONS FOR STATIC MIXER

1. Clean, dry and roughen surfaces to be bonded.
2. Remove black storage cap from the middle of black plunger. Turn syringe nozzle end up and pull back on

3. Snap off and discard end of syringe.
4. Insert static mixer into nozzle and twist 90 degrees.
NOTE: Static mixer applicator must lock in place before pushing plunger.
5. Push plunger evenly to dispense epoxy. Dispense directly onto surface to be bonded.
NOTE: Epoxy sets in 5 minutes and may be handled in 15 minutes. Cooler temperatures may require longer set time.
6. When finished, remove static mixing nozzle and discard. Wipe any excess epoxy from tip and replace black storage cap.

NOTE: Permatex® General Purpose Epoxy Products will not bond polyethylene and polypropylene plastics.

For Cleanup

1. For any cleanup, use isopropyl alcohol before the material is allowed to dry/cure.
2. Clean hands with Permatex® Fast Orange® hand cleaner or soap and water.

PROPERTIES OF UNCURED MATERIAL

Chemical Type	Typical Value
	Epoxy and Mercaptan or Amine Resins
Mix ratio (volume)	1 : 1
Appearance	
Resin	Clear
Hardener	Clear
Odor	Mild
Specific Gravity	1.10 - 1.17
Flash Point, TCC	>200°F
Viscosity	Heavy syrup

CURING PROPERTIES

	Working Time	Fixture Time
84160	50-60 seconds	2 – 4 minutes
84101	4 – 5 minutes	8 – 10 minutes
84107	30-35 minutes	45-50 minutes
84164	4 – 5 minutes	8 – 10 minutes
84201	4 – 5 minutes	8 – 10 minutes

Final color Clear to slightly yellow
Temperature range -60°F to +180°F (-51°C to 82°C)

GENERAL INFORMATION

This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected as an adhesive for chlorine or other strong oxidizing materials.

For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).

ORDERING INFORMATION

Part Number	Container Size
84160	1 min. general purpose epoxy, 0.84 fl. Oz. dual syringe, carded
84101	5 min. general purpose epoxy, 0.84 fl. Oz. dual syringe, carded
84107	30 min. crystal clear epoxy, 0.84 fl. Oz. dual syringe, carded
84164	5 minute clear general purpose epoxy, 0.47 fl. Oz. dual syringe/static mixer, carded
84201	5 min. general purpose epoxy, 2 – 1oz. tubes, carded

STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range. To prevent contamination of unused product, do not return any material to its original container.

NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.